


OWNERS MANUAL (DA-30)

Thank you very much for purchasing a DA-30 Acoustic Amplifier.

All of these controls are designed to give the widest variety of tones practice with, including an amplifier stack.

Please read this instruction manual carefully before turning your DA-30 on.

FRONT PANEL

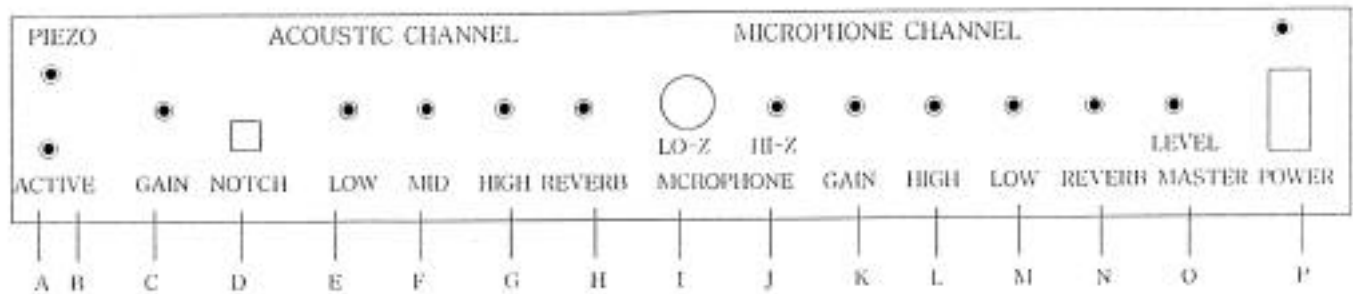

ACOUSTIC CHANNEL

- A. PIEZO(Input jack for acoustic guitar-piezo pick up coil)
- B. ACTIVE(Input jack for acoustic guitar-active pick up coil)
- C. GAIN(Controls the gain level for acoustic channel)
- D. NOTCH/FILTER(When you push s/w on, cut feedback frequency sound)
- E. LOW(Controls the low frequency)
- F. MIDDLE(Controls the middle frequency)
- G. HIGH(Controls the high frequency)
- H. REVERB(Controls the reverb level of acoustic channel)

MICROPHONE CHANNEL

- I. LOW-Z(Input jack for microphone-low impedance microphone)
- J. HIGH-Z(Input jack for microphone-high impedance microphone)
- K. GAIN(Controls the gain level for microphone channel)
- L. HIGH(Controls the high frequency)
- M. LOW(Controls the low frequency)
- N. REVERB(Controls the reverb level of microphone channel)
- O. MASTER(Controls the overall volume level of the Amplifier)
- P. POWER(Turn the amplifier on/off)

SPECIFICATIONS

1. OUTPUT POWER ——— 30W(RMS) 40W(PEAK)
2. SPEAKER ——— 5inch(8 ohm) * 4EA
3. INPUT ——— GUITAR-PIEZO/ACTIVE, MICROPHONE-LOW-Z/HIGH-Z
4. OUTPUT ——— HEADPHONE, SEND, RETURN
5. DIMENSION ——— 450.0(W) * 205.0(D) * 450.0(H)

* The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.